




The roller banner is constructed from bamboo which together with its compact styling, makes it an unusual alternative to aluminium banners

Features & benefits


- Quick-change slider top rail
- Self adhesive quick applying graphic leader
- Twist out stabilising foot for extra stability
- Lightweight components
- Includes quality padded carry bag

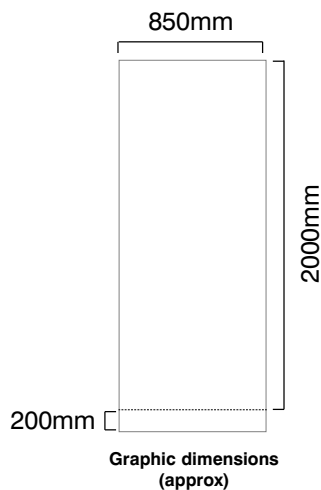


Hardware specifications	Graphic specifications	Additional info
<p>Hardware Dimensions (mm): 2110 (h) x 910 (w) x 340 (d) approx. (Depth dimension refers to twist out foot)</p> <p>Weight: 3.2kg approx (including carry bag)</p>	<p>Visible Graphic Dimensions (mm): 1920(h) x 850 (w) approx</p> <p>Substrate: Add 200mm to base of graphic to allow for roller mechanism. Recommended material thickness 225 - 300 Microns</p>	<p>Included in kit: Top rail, base, 3 piece pole and carry bag</p>

Assembly Instructions


Banner stand assembly



1 Assemble the 3 part pole set.

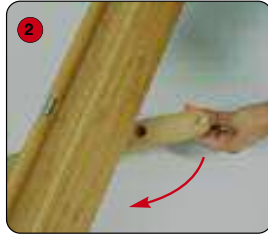

2 Open out the stabilising foot.

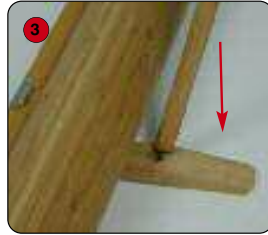


3 Fit the bungee pole into the stabilising foot.



4 Lift the top rail to raise the graphic from the base.



5 Lean the banner stand backwards and continue to extend the graphic.

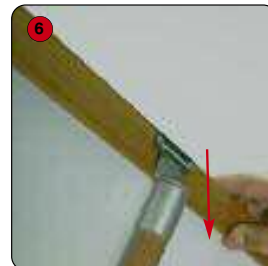


6 Secure the top rail onto the 3 piece pole.

Hold the Top rail whilst lowering the banner, (do not drop) to prevent damage to the graphic.

Graphic attachment instructions



1 Peel the backing from the adhesive rail. Line the top rail with the graphic and press down firmly

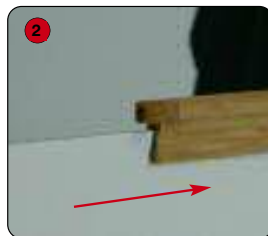

2 Slide the graphic squarely into the rail.



3 Rotate the end cap closed



4 Align and adhere the adhesive leader to the bottom of graphic. (attach to back of graphic)



5 Pull the pin from the roller banner making sure to keep hold of the graphic



6 Gently allow the graphic to retract.

After fitting, the graphic should be left for 24 hours before use, to ensure the adhesive bonds sufficiently.

Note: Opening the banner stand base may invalidate the product warranty.

