

Optional carry bag

Contents

- A) Centre support frame x1
- B) End support frames x2
- C) Horizontal poles x4
- D) Ground peg fixing loops x3
- E) Elastic graphic fixings x12
- F) Ground peg fixings x6

Optional Carry bag:

AB120C: 1250mm x 150mm diameter tube/bag. (Recommend transporting the frame and graphics separately)




1) Open up the end and centre supports, push the locking arm down to secure.




2) Making sure the joining pieces face inwards, push the top horizontal pole into the joining piece at both ends.




5) Repeat for the other side of the unit.

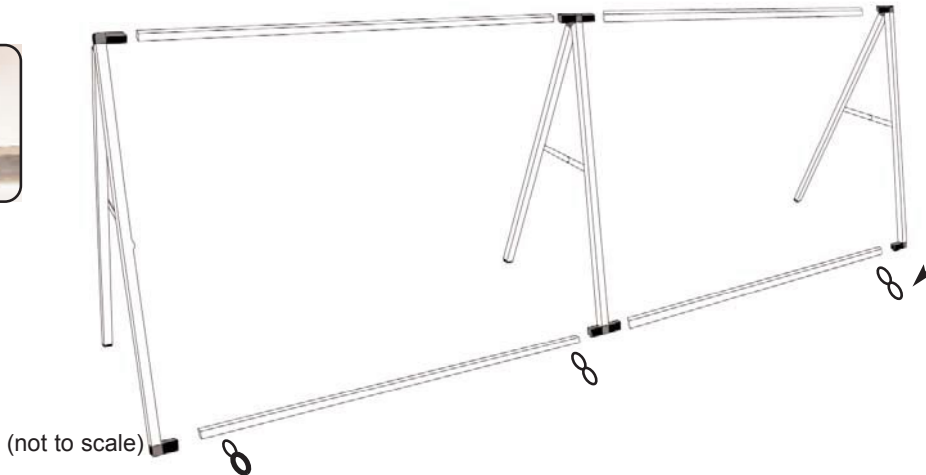

Ground fixing



Front fixing



Back fixing

To secure to grassed areas, push or hammer the peg fixing into the ground. Front: making sure the peg hooks through the fabric loop behind the graphic, Back: passing the peg through the hole in the support frame bracket.



3) Pass the bottom horizontal pole through the fabric loops for ground fixing.



4) Join the bottom horizontal pole in the same way as the top.