
Wall to Wall Cable Display

DiscountDisplays

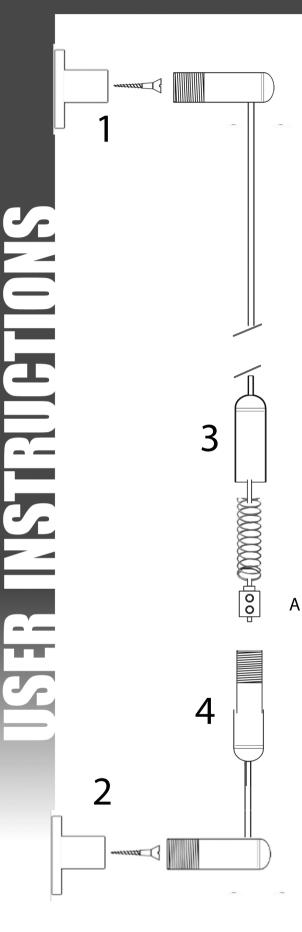

Fitting Instructions

Make sure the fixings are strong enough to allow tensioning of the cables. Screws supplied are suitable for wooden walls, for cavity and solid walls use the appropriate rawlplugs.

A) Fix fitting 1 to wall

B) Use a plumb line to mark the centre position of the floor lower wall fitting 5

C) Use a plumb line to mark the centre position of the floor fitting 5

D) Separate section 3 and 4 and connect to the wall fittings

E) Adjust the length of cable by loosening the grub screws at point A. Adjust to correct length, cut off excess cable then tighten grub screws

F) Adjust the tension by screwing 3 into 4. Do not over tighten

Distance between cable centres

The distance between cables depends on the literature or poster holders you are adding. To calculate width required add 34mm to the width of the holder.

EG

A4 poster holder is 210mm wide + 34mm = 244mm

The cable centres need to be 244mm apart