

MoonBase for iPad or Samsung Galaxy

Assembly Instructions



MoonBase

1

Fully remove security screw in rear of enclosure using key provided and lift fascia clear.

If you are not using cable management for charging, please proceed to stage 3.



2

Feed charge/sync cable through central holes in unit, so it protrudes from the enclosure and base.



3




If applicable, plug charge/sync cable into tablet. Place tablet inside enclosure ensuring it is centrally positioned within the relevant corner mouldings.

4



Replace fascia, re-insert and tighten security screw to secure.

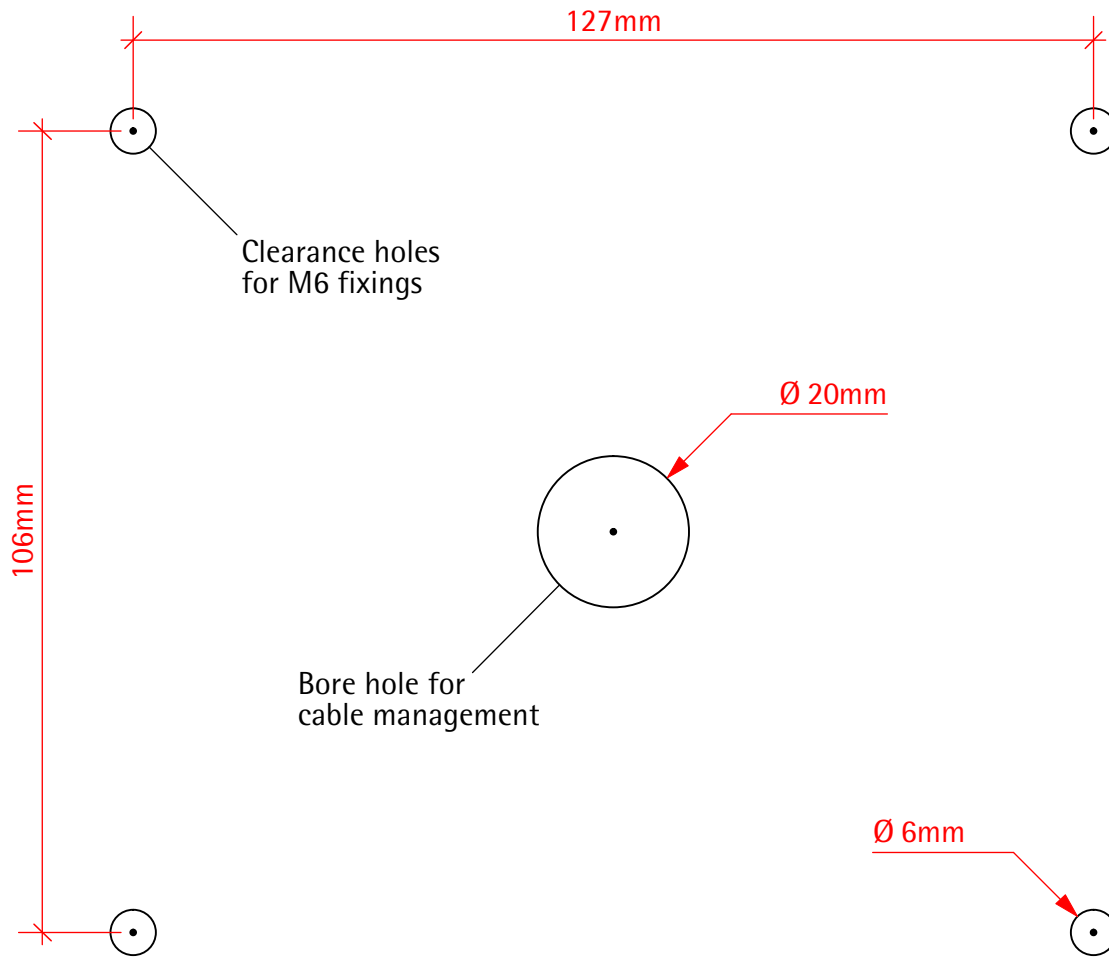

Template for optional screw mounting

MoonBase Lock and Cable

1



Affix security slot plate provided to underside of base.

2



Lasso the security cord to a stationary anchor point, by passing the lock body through the looped end of the security cable.

3



Align and insert end of lock into security slot of MoonBase plate.

4



Rotate key through 90° to lock.